


Schottky Diodes

Features

- Reverse Voltage - 20 to 200 V
- Forward Current - 3.0 A
- Metal silicon junction, majority carrier conduction
- For surface mounted applications
- Low power loss, high efficiency
- High forward surge current capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications



■ Simplified outline(SMA)



Absolute Maximum Ratings and Electrical characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

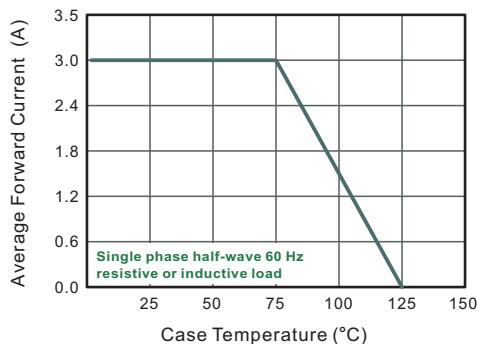
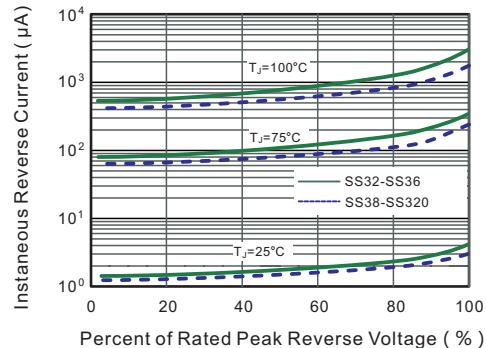
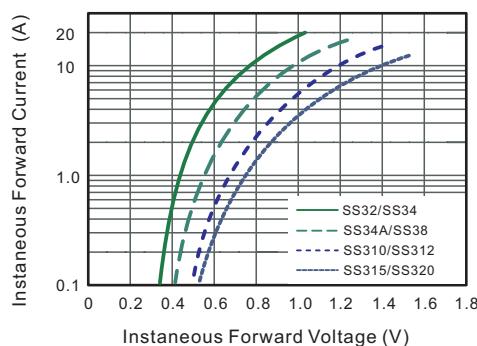
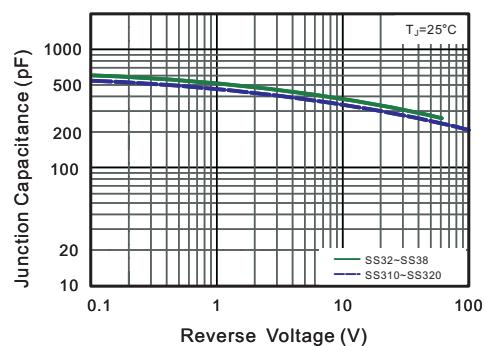
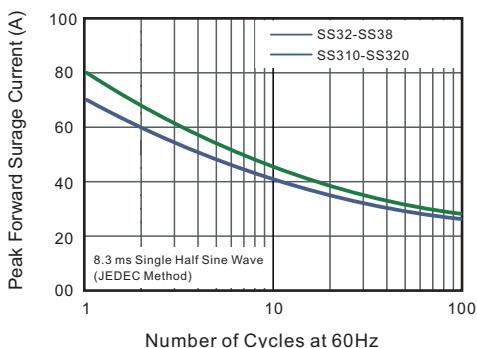
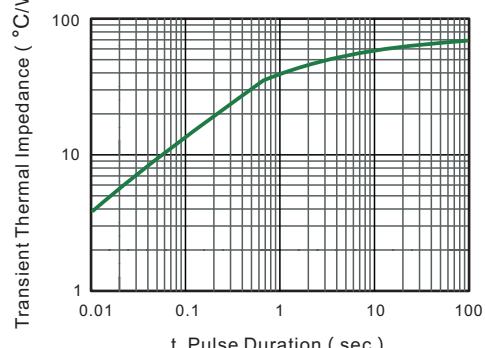
Parameter	Symbols	SS32	SS34	SS34A	SS36	SS38	SS310	SS312	SS315	SS320	Units								
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	40	45	60	80	100	120	150	200	V								
Maximum RMS voltage	V_{RMS}	14	28	31.5	42	56	70	84	105	140	V								
Maximum DC Blocking Voltage	V_{DC}	20	40	45	60	80	100	120	150	200	V								
Maximum Average Forward Rectified Current	$I_{F(AV)}$	3.0									A								
Peak Forward Surge Current,8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	80				70				A									
Max Instantaneous Forward Voltage at 3 A	V_F	0.55		0.70			0.85		0.95		V								
Maximum DC Reverse Current $T_a = 25^\circ C$ at Rated DC Reverse Voltage $T_a = 100^\circ C$	I_R	0.5 5			0.3 3			mA											
Typical Junction Capacitance ⁽¹⁾	C_j	450			400			pF											
Typical Thermal Resistance ⁽²⁾	$R_{\theta JA}$	70									°C/W								
Operating Junction Temperature Range	T_j	-55 ~ +125									°C								
Storage Temperature Range	T_{stg}	-55 ~ +150									°C								

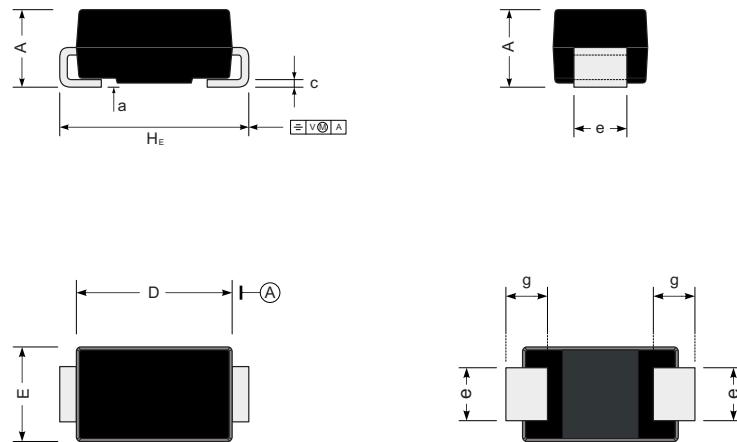
(1) Measured at 1 MHz and applied reverse voltage of 4 V D.C

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.


Marking

NO.	SS32	SS34	SS36	SS38	SS310	SS312	SS315	SS320
Marking	SS32	SS34	SS36	SS38	SS310	SS312	SS315	SS320

Fig.1 Forward Current Derating Curve

Fig.2 Typical Reverse Characteristics

Fig.3 Typical Forward Characteristic

Fig.4 Typical Junction Capacitance

Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

Fig.5- Typical Transient Thermal Impedance


■ SMA


UNIT		A	D	E	H _E	c	e	g	a
mm	max	2.2	4.5	2.7	5.2	0.31	1.6	1.5	0.3
	min	1.9	4.0	2.3	4.7	0.15	1.3	0.9	
mil	max	87	181	106	205	12	63	59	12
	min	75	157	91	185	6	51	35	

■ The recommended mounting pad size

Unit : $\frac{\text{mm}}{(\text{mil})}$