

SOD-882 Plastic Package **Schottky Barrier Diode**

Absolute Maximum Ratings T_A = 25°C unless otherwise noted

Symbol	Parameter	Value	Units	
P_{D}	Power Dissipation	150	mW	
T _{STG}	Storage Temperature Range	-55 to +125	°C	
TJ	Operating Junction Temperature	+125	°C	
V_R	DC Reverse Voltage	30	V	
I _{F(AV)}	Average Forward Current	200	mA	
I _{FSM}	I _{FSM} Peak Forward Surge Current (At 8.3ms single half sine-wave)		А	

These ratings are limiting values above which the serviceability of the diode may be impaired.

Green Product



SOD882 Package



Specification Features:

Low Forward Voltage Drop

Small Surface Mounting Type

RoHS Compliant

Green EMC

Matte Tin(Sn) Lead Finish

999999 **Band Indicates Cathode**

Weight: approx. 0.001g

DEVICE MARKING CODES:

Device Type	Marking	Shipping		
RB521S8-30	F	10,000/Tape & Reel		

Electrical Characteristics T_A = 25°C unless otherwise noted


Symbol	Parameter	Test Condition	Limits		Unit
	rarameter	rest Condition	Min	Max	Onit
I _R	Reverse Leakage Current	V _R =10V		30	μA
V _F	Forward Voltage	I _F =10mA		0.35	Volts
		I _F =200mA		0.50	Volts

Number: DB-293 October 2016, Revision A





SOD882 Package Outline

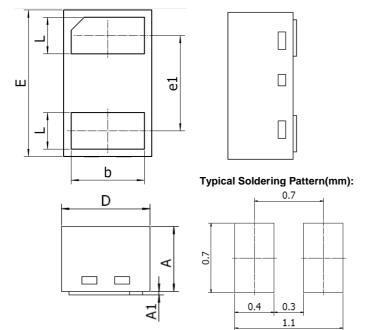

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
Α	0.46	0.50	0.018	0.020
A1		0.03		0.001
b	0.45	0.55	0.018	0.022
D	0.55	0.65	0.022	0.026
Е	0.95	1.05	0.037	0.041
e1	Тур. 0.65		Тур. 0.026	
L	0.20	0.30	0.008	0.012



NOTICE

The information presented in this document is for reference only. Tak Cheong reserves the right to make changes without notice for the specification of the products displayed herein.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Tak Cheong Semiconductor Co., Ltd., or anyone on its behalf, assumes no responsibility or liability for any damagers resulting from such improper use of sale.

This publication supersedes & replaces all information reviously supplied. For additional information, please visit our website http://www.takcheong.com, or consult your nearest Tak Cheong's sales office for further assistance.

Number: DB-100 April 14, 2008 / A

_